

CompactCom™ M40 for POWERLINK

The Anybus CompactCom M40 for Powerlink is a complete communication module which enables your products to communicate on an Ethernet POWERLINK network. The module supports fast communication speeds, making it suitable also for high-end industrial devices.

By implementing the CompactCom concept into your product line, you will have instant access to any other industrial network by simply plugging in another Anybus module.



ETHERNET 
POWERLINK

Why worry about networking?

Once you have implemented the Anybus CompactCom concept, you don't have to worry about network upgrades or certifications. HMS takes care of the network maintenance, so you can focus on your products.

If you need fast POWERLINK communication

The Anybus CompactCom M40 enables fast communication between your device and Powerlink (process data latency is less than 15 μ s through the module).

The module comes with an integrated Ethernet hub implemented in the module's NP40 chip and supports multiplexing and PollResponse Chaining. It has a response time of 1 μ s (time from PollRequest to PollResponse) and a synchronization jitter of max. 1 μ s.

Features and benefits

- A complete, interchangeable communication module with connectors.
- Short in-design with free assistance from HMS ensures a fast time to market.
- Pre-certified for network compliance (enables faster network certification).
- Fast data transfer: Up to 1490 bytes of process data in each direction.
- Very low latency <15 μ s.
- Event-based interface method enables easy to access input and output data at any time.
- Fast, event-based application hardware interfaces: 8/16-bit parallel and high speed SPI. I/O (shift register interface) is also available.
- One hardware platform for all Ethernet versions. Simply download new firmware to enable communication with another network for example PROFINET or EtherCAT.
- Firmware management tool enables easy download via serial connection.
- Clock-synchronous operation.
- Solid security: Mandatory software signatures prevent unauthorized software to be downloaded to the module. Furthermore, encryption is used to prevent illicit copying.

CompactCom 40-series

The M40 is part of the Anybus CompactCom 40-series — communication products in chip, brick and module formats. These are all built on the Anybus NP40 processor making them especially suitable for modern and demanding industrial applications.



Innovative mounting

The Anybus module plugs into a CompactFlash™ connector which is integrated onto the host PCB. HMS offers a CompactFlash connector specifically tailored for the CompactCom module.



Best-in-class processor


The M40 is equipped with the best network processor on the market according to independent analyst firm Frost & Sullivan.



Technical specifications

Technical Details	
Dimensions (L • W • H)	52•50•22 mm, 2.04•1.97•0.86" 51•37•16 mm, 2.01•4.46•0.63" (modules without housing)
Protection class	IP20
RoHS Compliance	Yes
Galvanically isolated network interface	Yes
Application interfaces	- 8/16-bit parallel (30 ns access) - High speed SPI, baudrate configurable up to 20 MHz - I/O (shift register interface, cyclical update time 82 µs) - UART (for backwards compatibility with 30-series, max 625kbps)
Profile support	Generic
LED indicator	Integrated on front (with housing), via application interface (without housing). Indicates Module Status and Network Status.
Certifications	
UL, cUL	Yes
Network conformance	Yes
CE - Declaration of Pre-Conformity	
Emission EN 61000-6-4	EN55016-2-3 Radiated emission EN55022 Conducted emission
Immunity EN 61000-6-2	EN61000-4-2 Electrostatic discharge, EN61000-4-3 Radiated immunity. EN61000-4-4 Fast transients/burst, EN61000-4-5 Surge immunity. EN61000-4-6 Conducted immunity.
Electrical Characteristics	
Power requirements	3.3 VDC, +/- 0.15 VDC
Environmental Characteristics	
Operating temp	-40 to 70 °C, -40-158 °F -40 to 85 °C, -40-176 °F (modules without housing)
Humidity	5-95 % non-condensing


POWERLINK-specific technical highlights
Integrated HUB.
The module is capable of participating as an isochronous Controlled Node (CN) in EPL networks.
100 Mbits/second, half duplex.
Supports Async MTU size up to 1500 bytes.
Supports Process Data Object (PDO) for real-time data transfer.
Supports a PDO size of 1490 bytes.
Supports static as well as dynamic mapping.
Ring redundancy.
Supports "Generic mode" (The module will forward all object requests >= 0x2001 to the host application making it possible for the host application to implement profiles on its own.)
Sync functionality on POWERLINK (sync signal on SoC).
Firmware update over POWERLINK network.
Supports dynamic process data remapping from the network.
Process Data Objects (PDOs) for I/O exchange and Service Data Object (SDO) for explicit messaging.
Cycle times down to 200 µs.
Support for 57343 ADIs.
Process data sizes up to 1490 bytes.

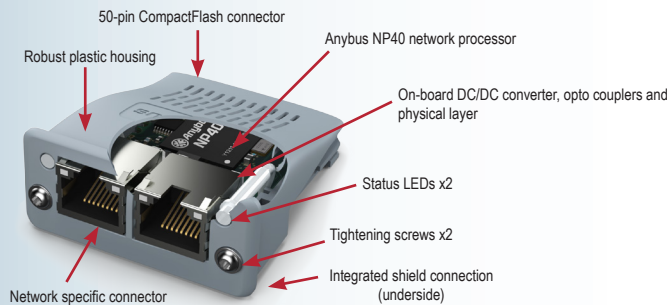

Module mounting

The CompactCom module slides into a pre-designated slot in the host automation device PCB. The module is secured with an innovative mechanism by tightening the two screws located on the front cover of the CompactCom module.

HMS offers a customized CompactFlash connector for Anybus CompactCom. The module insertion can be made at any stage in the logistical chain between the automation device manufacturer and the end customer. CompactCom slot cover available on request from HMS.

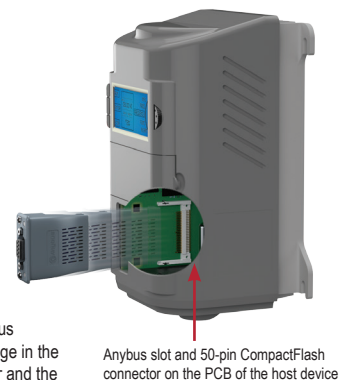

HMS Industrial Networks - Worldwide

HMS - Sweden (HQ)

Tel : +46 35 17 29 00 (Halmstad HQ)
Tel: + 46 35 17 29 24 (Västerås office)
E-mail: sales@hms-networks.com

HMS - France

Tel: +33 368 368 034
E-mail: fr-sales@hms-networks.com

HMS - Italy

Tel : +39 039 59662 27
E-mail: it-sales@hms-networks.com

HMS - United States

Tel: +1 312 829 0601
E-mail: us-sales@hms-networks.com

HMS - China

Tel : +86 (0)10 8532 3183
E-mail: cn-sales@hms-networks.com

HMS - Germany

Tel: +49 721 989777-000
E-mail: ge-sales@hms-networks.com

HMS - Japan

Tel: +81 45 478 5340
E-mail: jp-sales@hms-networks.com

HMS - Denmark

Tel: +45 35 38 29 00
E-mail: dk-sales@hms-networks.com

HMS - India

Tel: +91 20 40111201
E-mail: in-sales@hms-networks.com

HMS - UK

Tel: +44 1926 405599
E-mail: uk-sales@hms-networks.com

Anybus® is a registered trademark of HMS Industrial Networks AB, Sweden, USA, Germany and other countries. Other marks and words belong to their respective companies. All other product or service names mentioned in this document are trademarks of their respective companies.

Part No: MMA316 Version 1 01/2014 - © HMS Industrial Networks - All rights reserved - HMS reserves the right to make modifications without prior notice.