

Model Information



■ Features

- 2 x RS232/422/485 ports
- USB 2.0 Full Speed interface
- 2.5kV isolation per serial port
- USB and serial ports ESD protected
- Robust metal case
- Jumperless, DIP ports configuration
- Serial speed max. 1000(RS232) / 3000(RS485) kbps
- DIN-Rail and Wall mount options
- Bus powered, no external power supply
- Wide range operating temperature (-25°C - +75°C)


[Contact Online...](#)

USB-2COM Plus ISO

(USB-2COMi SI-M)

Quick Link: | [Features](#) | [More Pictures](#) | [Overview](#) | [USB Interface](#) | [Serial Interface](#) | [Software](#) | [Power and Environment](#) | [Ordering Information](#) | [Options](#) | [Packaging](#) |

■ More Pictures

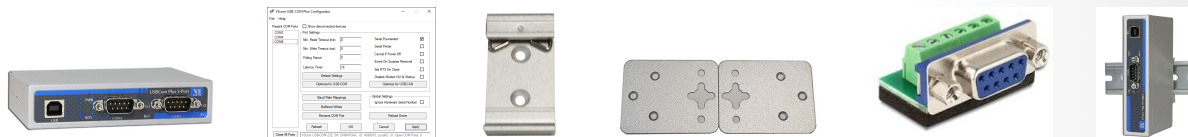

Click on the thumbnails for the large picture ...

[>Back to top](#)

■ Overview

The modern USB-2COM Plus ISO adapter connects 2 x RS232 or RS422/485 devices to your PC by a USB 2.0 Full Speed port. The serial ports are individually isolated for 2.5kV. The serial ports and USB are ESD protected, compliant to IEC 61000-4-2 (8kV contact/16kV air discharges).

All serial ports support RS232, RS422 and RS485 in Full-/Half-Duplex operation mode. The operation modes of the serial ports are easy configured by one DIP switch for each port. The configuration also activates built-in RS485 termination if required, no jumpers needed. Standard Drivers are available for all major operating systems. The USB 2.0 Full-Speed enables serial data rates of up to 3Mbps in RS422/485 or 1000kbps in RS232 modes. The device also allows every non-standard bitrate up to 960 kbps.

All USB-COM Plus devices can be used to expand the serial ports for [NetCom Plus Device Servers](#).

■ USB Interface

USB-Input	USB 2.0 Full Speed, USB 1.1 compliant
Connector	USB type B
Protection	Compliant with IEC 61000-4-2 ESD 8kV contact / 16kV air discharge

[>Back to top](#)

■ Serial Interface

Ports	<ul style="list-style-type: none"> • 2 x RS232/422/485 configured by DIP switch • RS485 Termination configured by DIP switch
--------------	--

	<ul style="list-style-type: none"> • Polarization/BIAS not required • Connector DSub-9 male
Speed	<ul style="list-style-type: none"> • RS232: 180bps - 921.6/1000kbps • RS422: up to 3Mbps • RS485: up to 3Mbps
Available Modes	<ul style="list-style-type: none"> • RS232 full duplex • RS422 full duplex • RS485 4-wire, full duplex • RS485 2-wire, half duplex (bus-mode)
Signals	<ul style="list-style-type: none"> • RS232: TxD, RxD, RTS, CTS, GND • RS422: Tx+/-, Rx+/-, GND • RS485 4-wire: Tx+/-, Rx+/-, GND • RS485 2-wire: Data+/-, GND <p>All signals isolated for 2.5kV</p>
Protection	<ul style="list-style-type: none"> • Galvanically isolated 2.5kV • Compliant with IEC 61000-4-2 ESD 8kV contact / 16kV air discharge
Configuration	One DIP switch for each port defines operation mode and RS422/485 termination

[>Back to top](#)

■ Software

Driver	<ul style="list-style-type: none"> • Windows 2000 to Windows 10 (x86 and x64) • Windows Server 2000 to 2012 (x86 and x64) • Linux (Kernel 2.6 and later built-in) • Mac OS X <p>Installation by automatic download from the Internet</p>
---------------	--

[>Back to top](#)

■ Power and Environment

Connector	USB bus powered, no external supply
Protection	Compliant with IEC 61000-4-2 ESD 8kV contact / 16kV air discharge
Dimension	115×73×25 mm ³ (W×L×H)
Operating Temp	-25°C - 75°C
Storage Temp	-30°C – 85°C
Case	SECC sheet metal (0.8mm)
Weight	0.25kg
Mounting	<ul style="list-style-type: none"> • DIN-Rail (optional) • Wall mount (optional)
LEDs	LEDs for Power, Ready, serial Tx, Rx

[>Back to top](#)

■ Ordering Information

607	USB-2COM Plus ISO (2x RS232/422/485, isolated)
605	USB-2COM Plus (2x RS232/422/485, non-isolated)

[>Back to top](#)

■ Options

6692	DK-NCP DIN-Rail mounting kit
6693	WK-NCP Wallmount kit

663

6-pin Terminal block adapter to DB9 female

[661](#)

Serial Null-Modem adapter 9PF-9PF, change male to female

[>Back to top](#)

■ Packaging

Packing list

USB-2COM Plus ISO device

[>Back to top](#)

USB-2COM Plus ISO

[>Back](#)



USB-COM Plus Configurator

[>Back](#)

VScom USB-COM Plus Configurator

File Help

Present COM-Ports Show disconnected devices

COM3
COM4
COM6

Port Settings

Min. Read Timeout (ms):

Min. Write Timeout (ms):

Polling Period:

Latency Timer:

Serial Enumerator

Serial Printer

Cancel If Power Off

Event On Surprise Removal

Set RTS On Close

Disable Modem Ctrl At Startup

Default Settings

Optimize for USB-COM

Optimize for USB-CAN

Baud Rate Mappings

Buffered Writes

Rename COM Port

Global Settings

Ignore Hardware Serial Number

Reload Driver

Refresh OK Cancel Apply

Close All Ports

VScom USB-COM 232, SN: DN6NP3AA, ID: 4036015, LocalID: 31; Open COM Ports: 0

DIN-Rail Mounting Kit

[>Back](#)



Wall Mounting Kit

[>Back](#)



Terminal Block Adapter

[>Back](#)



**USB-COM Plus on DIN-Rail,
USB-2COM Plus ISO is similar**

[>Back](#)

