

Model Information



■ Features


- 4 x RS232 ports
- USB 2.0 High Speed interface
- USB, serial ports and power supply ESD protected
- Robust metal case
- Serial speed max. 1000 kbps
- 19-inch and Wall mounting options
- Bus powered or ext. DCin 9-54V
- Easy port expansion via USB-Out type A connector
- Wide range operating temperature (-25°C - +75°C)

[Contact Online...](#)

# USB-4COM Plus 232 (USB-4COM-M)

Quick Link: | [Features](#) | [More Pictures](#) | [Overview](#) | [USB Interface](#) | [Serial Interface](#) | [Software](#) | [Power and Environment](#) | [Ordering Information](#) | [Options](#) | [Packaging](#) |

■ More Pictures

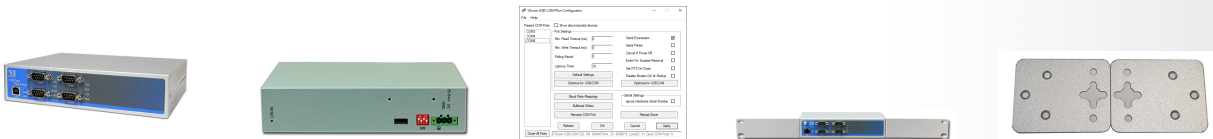

Click on the thumbnails for the large picture ...

[>Back to top](#)

■ Overview

The modern USB-4COM Plus 232 adapter connects 4 x RS232 devices to your PC by one USB 2.0 High Speed port. The serial ports, USB and the power supply are ESD protected, compliant to IEC 61000-4-2 (8kV contact/16kV air discharges). USB-4COM Plus 232 works in bus-powered mode, but a DCin connector for external wide range voltage is also provided.

All serial ports support RS232. Standard Drivers are available for all major operating systems. The USB 2.0 High-Speed enables serial data rates of up to 1000kbps. The device also allows every non-standard bitrate.

A USB-out (type A) connector at the rear side allows easy expansion of serial ports by simple concatenation of further USB-COM Plus modules; we call it "USB-Through" feature.

■ USB Interface

<b>USB-Input</b>	USB 2.0 High Speed, USB 1.1 compliant
<b>Connector</b>	USB type B
<b>Protection</b>	Compliant with IEC 61000-4-2 ESD 8kV contact / 16kV air discharge
<b>USB-Out</b>	USB 2.0 High Speed, USB 1.1 compliant
<b>Connector</b>	USB type A (at rear side) Used to connect more USB-(x)COM modules for port expansion.
<b>Protection</b>	Compliant with IEC 61000-4-2 ESD 8kV contact / 16kV air discharge

[>Back to top](#)

## ■ Serial Interface

<b>Ports</b>	<ul style="list-style-type: none"><li>• 4 x RS232</li><li>• Connector DSub-9 male</li></ul>
<b>Speed</b>	180bps - 921.6/1000kbps
<b>Signals</b>	TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
<b>Protection</b>	Compliant with IEC 61000-4-2 ESD 8kV contact / 16kV air discharge

[>Back to top](#)

## ■ Software

<b>Driver</b>	<ul style="list-style-type: none"><li>• Windows 2000 to Windows 10 (x86 and x64)</li><li>• Windows Server 2000 to 2012 (x86 and x64)</li><li>• Linux (Kernel 2.6 and later built-in)</li><li>• Mac OS X</li></ul> Installation by automatic download from the Internet
---------------	--

[>Back to top](#)

## ■ Power and Environment

<b>Power Consumption</b>	<ul style="list-style-type: none"><li>• Bus-powered: 5V 500mA via USB</li><li>• Self-powered: DCin 9 - 54V, 3W</li></ul>
<b>USB Supply</b>	Bus-powered possible on standard USB ports. The DCin supply is compulsory to support USB-Out. It is also necessary for USB ports with lesser power output.
<b>DCin Supply</b>	<ul style="list-style-type: none"><li>• DCin specs: Wide range 9 - 54V DC, 3W</li><li>• Connector: 3-pin industrial Terminal Block (Plus / Minus / Protective Earth)</li></ul>
<b>DCin Protection</b>	Compliant with IEC 61000-4-2 ESD 8kV contact / 16kV air discharge
<b>Dimension</b>	196×147×44 mm <sup>3</sup> (W×L×H)
<b>Operating Temp</b>	-25°C - 75°C
<b>Storage Temp</b>	-30°C – 85°C
<b>Case</b>	SECC sheet metal (0.8mm)
<b>Weight</b>	0.9kg
<b>Mounting</b>	<ul style="list-style-type: none"><li>• 19-inch Rack</li><li>• Wall mount</li></ul>
<b>LEDs</b>	LEDs for Power, Ready, serial Tx, Rx

[>Back to top](#)

## ■ Ordering Information

<b>6609</b>	USB-4COM Plus 232 (4x RS232, non-isolated, expandable)
-------------	--

[>Back to top](#)

## ■ Options

<b>6031</b>	DC Power supply adapter 12V @ 1A
<b><u>661</u></b>	Serial Null-Modem adapter 9PF-9PF, change male to female

[>Back to top](#)

## ■ Packaging

<b>Packing list</b>	<ul style="list-style-type: none"><li>• USB-4COM Plus 232 device</li><li>• Mounting brackets for 19-inch rack</li><li>• Wallmount plates</li></ul>
---------------------	--

[>Back to top](#)

## USB-4COM Plus 232

[>Back](#)



USB-4COM Plus back side

[>Back](#)



# USB-COM Plus Configurator

[>Back](#)

VScom USB-COM Plus Configurator

File Help

Present COM-Ports  Show disconnected devices

COM3  
COM4  
COM6

Port Settings

Min. Read Timeout (ms):

Min. Write Timeout (ms):

Polling Period:

Latency Timer:

Serial Enumerator

Serial Printer

Cancel If Power Off

Event On Surprise Removal

Set RTS On Close

Disable Modem Ctrl At Startup

Default Settings

Optimize for USB-COM

Optimize for USB-CAN

Baud Rate Mappings

Buffered Writes

Rename COM Port

Global Settings

Ignore Hardware Serial Number

Reload Driver

Refresh OK Cancel Apply

Close All Ports

VScom USB-COM 232, SN: DN6NP3AA, ID: 4036015, LocalID: 31; Open COM Ports: 0

Rackmount Kit

[>Back](#)



---

## Wall Mounting Kit

[>Back](#)

