

[Zoom in Picture](#)

**■ Features**

- Universal PCI 3.3 / 5.0V
- 4x RS232
- UART 16550 (16 Byte FIFO)
- Speed 921 kbps
- PCI Plug and Play
- IRQ Interrupt sharing, only one Interrupt per card
- Drivers for Windows 95 to 7/2008 R2
- Software compatibel with DOS, Windows 3.11, OS/2, Linux and div. Unix

# VScom 400L UPCI

Quick Link: | [Features](#) | [Overview](#) | [Hardware Specifications](#) | [Performance Features](#) | [Operating Systems](#) | [Ordering Information](#) |

**■ Overview**

The L-series is an economic solution for standard applications. The serial ports are based on a 16C550A UART with 16 byte FIFO. The eightfold maximum speed allows some irregular transmission rates.

**■ Hardware Specifications**

<b>Ports</b>	4x RS232 (RxD, TxD, RTS, CTS, DTR, DSR, DCD, RI)
<b>UART</b>	4x 16550 (16 Byte FIFO)
<b>Address</b>	Plug and Play
<b>Interrupts</b>	PCI Plug and Play, only one interrupt/card
<b>Speed</b>	max. 921 kbps
<b>Bus interface</b>	Universal PCI 3.3V / 5.0V
<b>Connectors</b>	2x2 DB9 male (COM), 2x DB9 male (COM) (2. Slot)
<b>Size</b>	L120mm x H89mm
<b>Temperature</b>	0°C - 55°C

[>Back to top](#)

**■ Performance Features**

<b>FIFO</b>	FIFO size 16Byte adjustable Rx 1,4,8,14Bytes Tx 1 up to 16Bytes
<b>Handshake</b>	RTS / CTS Xon / Xoff
<b>Speed</b>	1bps up to 921kbps Multiplication factor for legacy applications
<b>UART</b>	UART emulation of 8250 and 16450

[>Back to top](#)

**■ Operating Systems**

<b>Windows 2000 up to 7</b>	VScom high performance serial driver, x86 and x64 Editions
<b>Server 2000 to 2008 R2</b>	VScom high performance serial driver, x86 and x64 Editions
<b>Windows NT 4.0</b>	VScom high performance serial driver control panel applet
<b>Windows 95, 98, SE, ME</b>	VScom high performance serial driver
<b>DOS</b>	virtuell address driver and compatibility tools real DOS Com port emulation
<b>OS/2</b>	Supported by COM16 driver in recent system releases Third party serial driver SIO.SYS available
<b>Linux</b>	Kernel 2.6 and up: built-in support Previous kernel: VScom high performance real tty driver
<b>div.UNIX</b>	configuration instructions


[>Back to top](#)

## ■ Ordering Information

<b>Art.No</b>	4465
<b>Product Name</b>	VScom 400L UPCI
<b>Packing list</b>	VScom 400L UPCI card 2nd Bracket with 2 Ports DSUB 9 male CD, English documentation

[>Back to top](#)

■ Full size product image

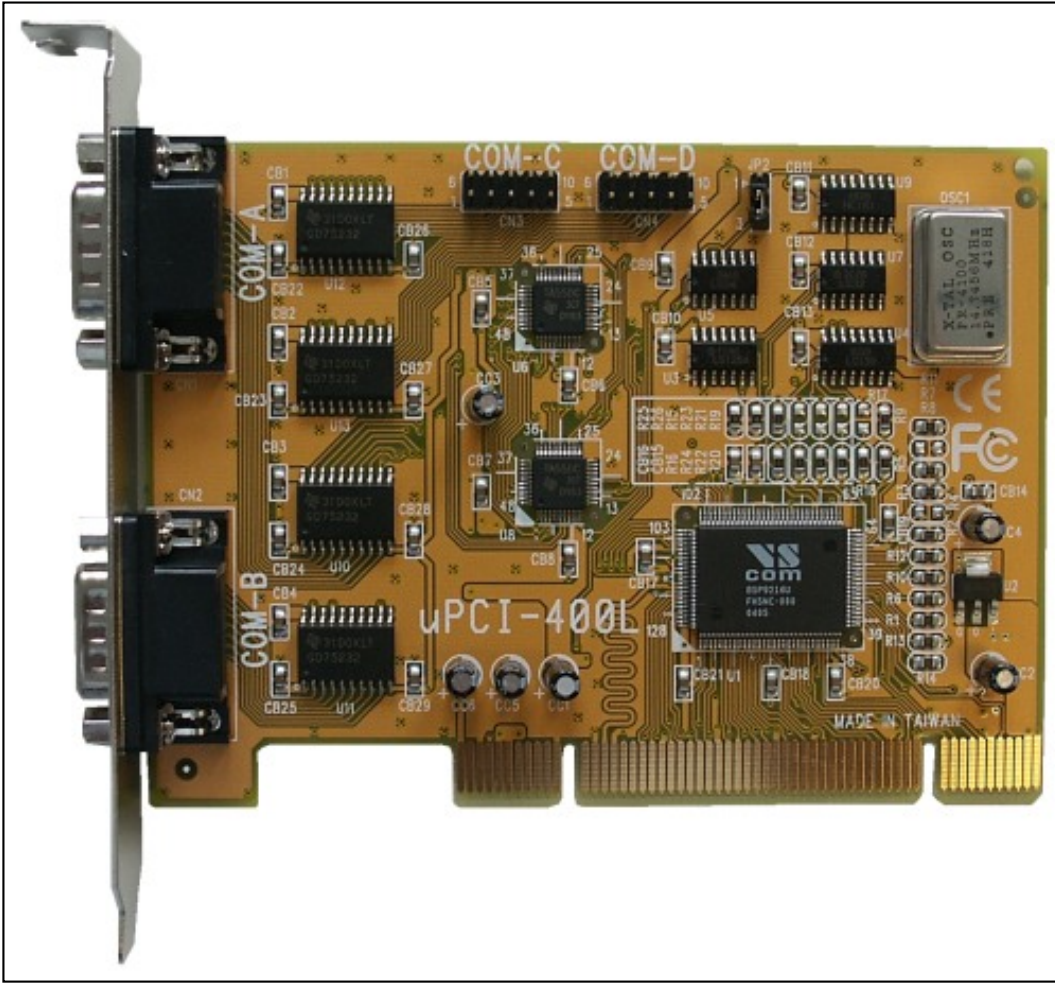

[>Back to top](#)