


Model Information

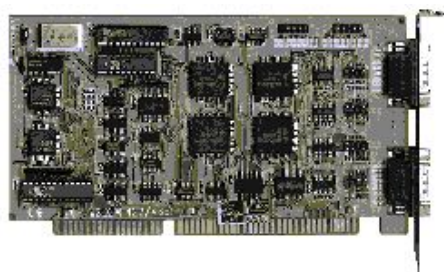

■ Features

- 4x RS422/485 optical isolated
- 4x 16C550 UARTs (16 Byte FIFO)
- Autoswitch
- no jumper, configured by software
- Software compatibel with DOS, Win3.x/95/98/ME/NT/2000, Linux, OS/2, Netware

Quick Link: | [Features](#) | [Download](#) |

Ports	4 x RS422/RS485
UART	4x 16C550 (16 Byte FIFO)
Address	100h .. 7F8h
Interrupts	IRQ2 .. IRQ15
Speed	max. 921 kbps
Bus interface	ISA
Connectors	2x DB9 male, 2x DB9 male (2. Slot)
Size	L17.4cm x H10.0cm
Temperature	0°C - 55°C
Operating Systems supported	compatible to DOS, Win3.x/95/98/ME/NT/2000, OS/2, Unix, Linux and Netware
Driver	DOS, Win3.x/95/NT

Ordering Information

- VScom 400i Pro
- cable
- driverdisk
- English documentation

