



[Zoom in Picture](#)

■ Features

- 8x RS232
- 8x 16C550 UARTs (16 Byte FIFO)
- possible I/O-addresses 100h..7F8h
- no jumper, configured by software
- Software compatibel with DOS, Win3.x/95/98/ME/NT/2000, Linux, OS/2, Netware


VScom 800 Pro

Quick Link: | [Features](#) |

Ports	8 x RS232 or RS422 (depending on connection-option)
UART	4x 16C550 (16 Byte FIFO)
Address	100h .. 7F8h
Interrupts	IRQ2 .. IRQ15, supports Interruptsharing
Speed	max. 921 kbps
Bus interface	ISA
Connectors	1x DB62 female
Size	L14.5cm x H10.0cm
Temperature	0°C - 55°C
Operating Systems supported	compatible to DOS, Win3.x/95/98/ME/NT/2000, OS/2, Unix, Linux and Netware
Driver	High-Speed Mode driver for Win95/NT; DOS-configuration utility
Ordering Information	VScom 800 Pro, disk, German documentation

[>Back to top](#)

■ [Full size product image](#)

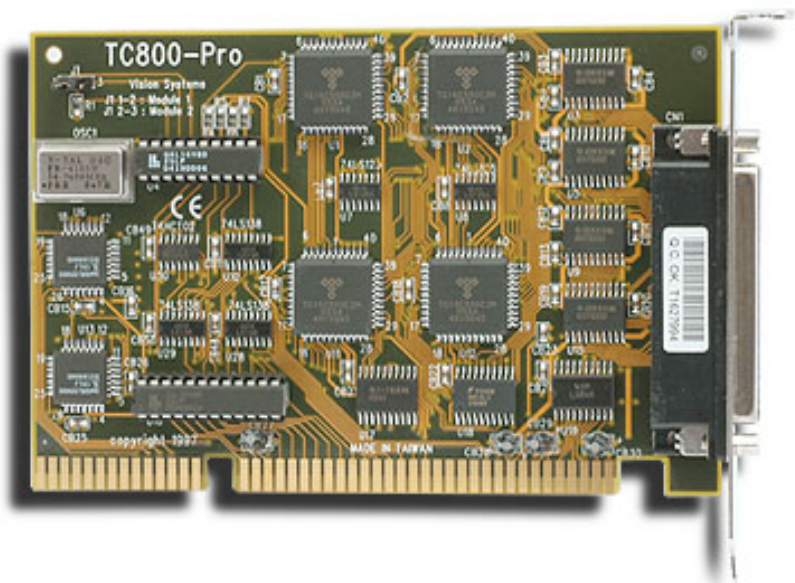

[>Back to top](#)