

## Model Information



### ■ Features

- 2 x RS232/422/485 ports
- USB 2.0 Full Speed interface
- USB and serial ports ESD protected
- Robust metal case
- Jumperless, DIP ports configuration
- Serial speed max. 1000(RS232) / 3000(RS485) kbps
- DIN-Rail and Wall mount options
- Bus powered, no external power supply
- Wide range operating temperature (-25°C - +75°C)


[Contact Online...](#)

# USB-2COM Plus

## (USB-2COM-M, USB-2COMi-M, USB-2COM-PRO)

Quick Link: | [Features](#) | [More Pictures](#) | [Overview](#) | [USB Interface](#) | [Serial Interface](#) | [Software](#) | [Power and Environment](#) | [Ordering Information](#) | [Options](#) | [Packaging](#) |

### ■ More Pictures

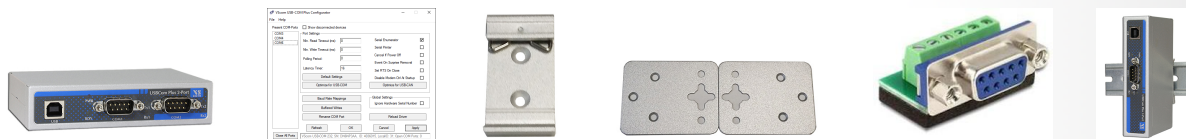

Click on the thumbnails for the large picture ...

[>Back to top](#)

### ■ Overview

The modern USB-2COM Plus adapter connects 2 x RS232 or RS422/485 devices to your PC by a USB 2.0 Full Speed port. The serial ports and USB are ESD protected, compliant to IEC 61000-4-2 (8kV contact/16kV air discharges).

All serial ports support RS232, RS422 and RS485 in Full-/Half-Duplex operation mode. The operation modes of the serial ports are easy configured by one DIP switch for each port. The configuration also activates built-in RS485 termination if required, no jumpers needed. Standard Drivers are available for all major operating systems. The USB 2.0 Full-Speed enables serial data rates of up to 3Mbps in RS422/485 or 1000kbps in RS232 modes. The device also allows every non-standard bitrate up to 960 kbps.

All USB-COM Plus devices can be used to expand the serial ports for [NetCom Plus Device Servers](#).

### ■ USB Interface

<b>USB-Input</b>	USB 2.0 Full Speed, USB 1.1 compliant
<b>Connector</b>	USB type B
<b>Protection</b>	Compliant with IEC 61000-4-2 ESD 8kV contact / 16kV air discharge

[>Back to top](#)

### ■ Serial Interface

<b>Ports</b>	<ul style="list-style-type: none"> <li>• 2 x RS232/422/485 configured by DIP switch</li> <li>• RS485 Termination configured by DIP switch</li> <li>• Polarization/BIAS not required</li> <li>• Connector DSub-9 male</li> </ul>
--------------	---

<b>Speed</b>	<ul style="list-style-type: none"> <li>• RS232: 180bps - 921.6/1000kbps</li> <li>• RS422: up to 3Mbps</li> <li>• RS485: up to 3Mbps</li> </ul>
<b>Available Modes</b>	<ul style="list-style-type: none"> <li>• RS232 full duplex</li> <li>• RS422 full duplex</li> <li>• RS485 4-wire, full duplex</li> <li>• RS485 2-wire, half duplex (bus-mode)</li> </ul>
<b>Signals</b>	<ul style="list-style-type: none"> <li>• RS232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, RI, GND</li> <li>• RS422: Tx+/-, Rx+/-, GND</li> <li>• RS485 4-wire: Tx+/-, Rx+/-, GND</li> <li>• RS485 2-wire: Data+/-, GND</li> </ul>
<b>Protection</b>	Compliant with IEC 61000-4-2 ESD 8kV contact / 16kV air discharge
<b>Configuration</b>	One DIP switch for each port defines operation mode and RS422/485 termination

[>Back to top](#)

## ■ Software

<b>Driver</b>	<ul style="list-style-type: none"> <li>• Windows 2000 to Windows 10 (x86 and x64)</li> <li>• Windows Server 2000 to 2012 (x86 and x64)</li> <li>• Linux (Kernel 2.6 and later built-in)</li> <li>• Mac OS X</li> </ul> <p>Installation by automatic download from the Internet</p>
---------------	--

[>Back to top](#)

## ■ Power and Environment

<b>Connector</b>	USB bus powered, no external supply
<b>Protection</b>	Compliant with IEC 61000-4-2 ESD 8kV contact / 16kV air discharge
<b>Dimension</b>	115×73×25 mm <sup>3</sup> (W×L×H)
<b>Operating Temp</b>	-25°C - 75°C
<b>Storage Temp</b>	-30°C – 85°C
<b>Case</b>	SECC sheet metal (0.8mm)
<b>Weight</b>	0.25kg
<b>Mounting</b>	<ul style="list-style-type: none"> <li>• DIN-Rail (optional)</li> <li>• Wall mount (optional)</li> </ul>
<b>LEDs</b>	LEDs for Power, Ready, serial Tx, Rx

[>Back to top](#)

## ■ Ordering Information

<b>605</b>	USB-2COM Plus (2x RS232/422/485, non-isolated)
<b>607</b>	USB-2COM Plus ISO (2x RS232/422/485, isolated)

[>Back to top](#)

## ■ Options

<b>6692</b>	DK-NCP DIN-Rail mounting kit
<b>6693</b>	WK-NCP Wallmount kit
<b>663</b>	6-pin Terminal block adapter to DB9 female
<b><a href="#">661</a></b>	Serial Null-Modem adapter 9PF-9PF, change male to female

[>Back to top](#)



## USB-2COM Plus

[>Back](#)



# USB-COM Plus Configurator

[>Back](#)

VScom USB-COM Plus Configurator

File Help

Present COM-Ports  Show disconnected devices

COM3  
COM4  
COM6

Port Settings

Min. Read Timeout (ms):

Min. Write Timeout (ms):

Polling Period:

Latency Timer:

Serial Enumerator

Serial Printer

Cancel If Power Off

Event On Surprise Removal

Set RTS On Close

Disable Modem Ctrl At Startup

Default Settings

Optimize for USB-COM

Optimize for USB-CAN

Baud Rate Mappings

Buffered Writes

Rename COM Port

Global Settings

Ignore Hardware Serial Number

Reload Driver

Refresh OK Cancel Apply

Close All Ports

VScom USB-COM 232, SN: DN6NP3AA, ID: 4036015, LocalID: 31; Open COM Ports: 0

---

**DIN-Rail Mounting Kit**

[>Back](#)



---

## Wall Mounting Kit

[>Back](#)



---

## Terminal Block Adapter

[>Back](#)





**USB-COM Plus on DIN-Rail,  
USB-2COM Plus is similar**

[>Back](#)

