

RESI-14RI-MODBUS, RESI-14RI-ASCII

Our IO modules with 14 digital inputs for 24-250Vac/dc signals

Our 14RI modules communicate with a RS485 interface via MODBUS/RTU slave protocol. Our RESI-xx-ASCII series offers additionally a text oriented ASCII protocol. The modules offer 14 digital inputs for 24-250Vac/dc signals. The modules count the rising and falling edges on each digital input separately. The modules are designed for applications in the building automation area and are well suited in industrial applications.



RESI-14RI-MODBUS
RESI-14RI-ASCII

RESI-14RI-MODBUS


MODBUS/RTU module with 14 digital inputs for 24-250Vac/dc signals via serial bus, Host communication: via RS485 with MODBUS/RTU slave protocol, Host baud rates: 4800, 9600, 19200, 38400, 57600, 115200, 230400 or 256000, no or even parity, 8 data bits, 1 stop bit, configuration and testing of module with free PC software MODBUS configurator, Weight: 265g, Dimension (LxWxH): 143x110x62mm, Power supply: 12-48V=, Power consumption: <0.5W, Mountable onto a EN50022 DIN rail or wall mounting.

RESI-14RI-ASCII

MODBUS/RTU or ASCII module with 14 digital inputs for 24-250Vac/dc signals via serial bus, Host communication: via RS485 with MODBUS/RTU slave protocol, Host baud rates: 4800, 9600, 19200, 38400, 57600, 115200, 230400 or 256000, no or even parity, 8 data bits, 1 stop bit, configuration and testing of module with free PC software MODBUS configurator, Weight: 265g, Dimension (LxWxH): 143x110x62mm, Power supply: 12-48V=, Power consumption: <0.5W, Mountable onto a EN50022 DIN rail or wall mounting.

RESI-MODBUS-CONFIGURATOR

Consisting of a free of charge software to configure our IO modules. Download from our homepage www.RESI.cc.

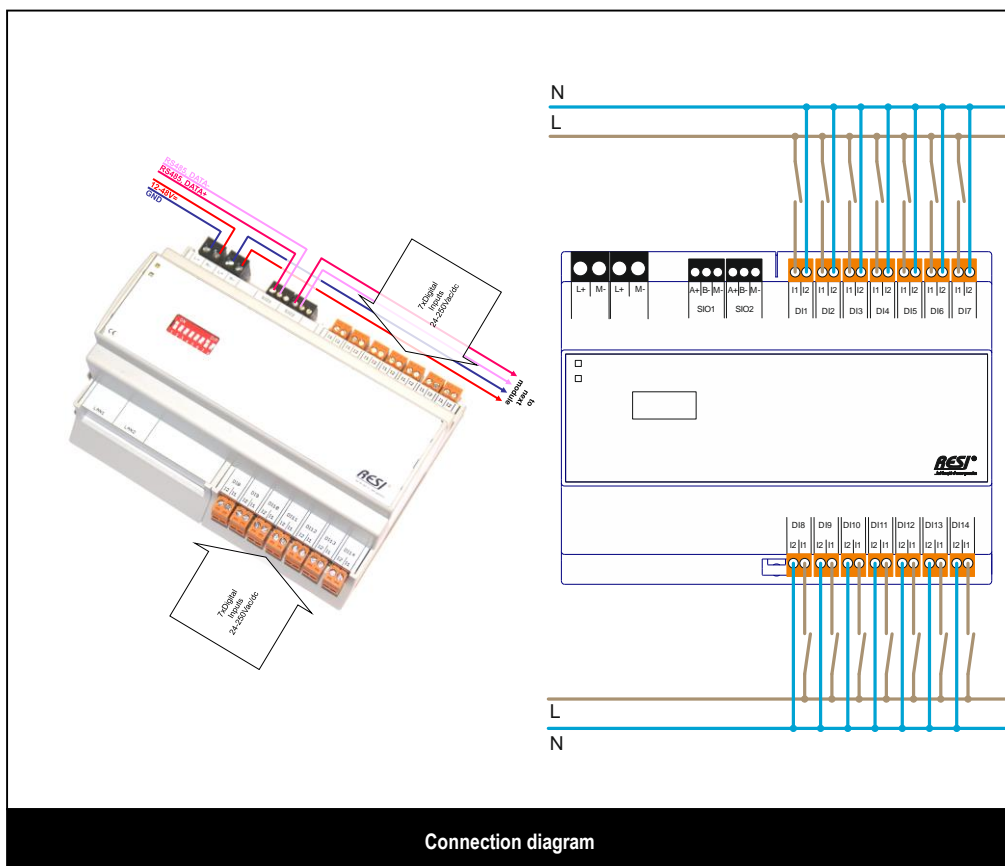

Connection diagram

AT A GLANCE

- ❑ Host communication: via RS485 with MODBUS/RTU or ASCII protocol
- ❑ Host baud rates: 4800, 9600, 19200, 38400, 57600, 115200, 230400 or 256000Bd, no or even parity, 8 data bits, 1 stop bit
- ❑ 14 digital inputs 24-250Vac/dc for pushbuttons, PLCs transistor outputs, etc.
- ❑ Power supply: 12-48V=
- ❑ Power consumption: <0.5W
- ❑ Size (LxWxH): 143x110x62mm
- ❑ Mountable onto a EN50022 DIN rail or wall mounting