


8x100TX Modular Interface Card (MIC)

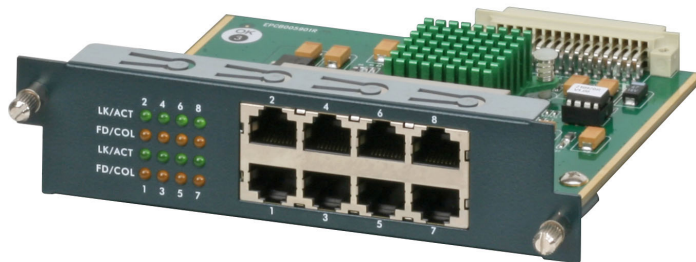

Specification

Standard	IEEE802.3 10Base-T IEEE802.3u 100Base-TX IEEE802.3x Flow control
Protocol	CSMA/CD
Switch architecture	Store and forward
Connector	8-port 100TX module: RJ-45
Transfer Rate	14880 Packets per second for 10Mbps 148800 Packets per second for 100Mbps
Network Cables	10Base-T: 2 pairs UTP/STP CAT.3, 4, 5 cable EIA/TIA 568 100Ohm(100M) 100Base-TX: 2 pairs UTP/STP CAT. 5 cable EIA/TIA 568 100Ohm(100M)
LED	8 100Base-TX module: Link/Activity (Green), Full duplex/collision(Orange)
Operating temperature	0°C~45°C(32°F to 113°F)
Operating Humidity	10%~90%RH
Storage temperature	-40°C~70°C, 95% RH
Dimension	126mm(W) x 46mm(D) x 35mm(H)
Weight	213g
EMI	FCC Class A, CE
Safety	UL, cUL, CE/EN60950

Order Information

Part Number	Product Family	Description
26000520	DragonLine	Modulare Interface Card 8x100TX