

MT-1200



Features

1. Intel ULV processor fanless platform
2. Sleek, compact and ruggedized design
3. Splash and dust resistant (IP 53)
4. Passing 32" high free fall drop testing
5. Data entry through stylus pen or touch screen
6. Ultra mobile wireless platform (802.11b/g)
7. Easy swappable storage tray for either HDD or CF card

RoHS

Touch
Screen

IP53
standard

Product Introduction

"The MT-1200 is a sleek, reliable and ruggedized mobile tablet PC which combining data capture and wireless communication technology. It is tailored to provide a wireless solution to access information from remote database via the internet or intranet. Featured with Intel ULV processor to enhance performance and effectiveness. A swappable storage tray for either 1.8" slim HDD or an industrial CF card. Fully integrated expansion slots & I/O enable you to connect with a variety of peripherals such as RFID reader, DVB-T card, barcode scanners, 2nd monitor...and so on. Equipped with special rubber ring shock-absorbing design and IP53 standard splash and dust resistant protection, it can be utilized in various critical environments.

The MT-1200 is your best solution in multiple sectors including field service, delivery, healthcare, education, logistics management, manufacturing process monitoring, hospitality and on-site services. It will enhance your efficiency and reduce in-field data management costs dramatically."

Product Highlights



Rubber Ring & LED



Swappable Storage Tray



Expansion Slots (PCMCIA & SD)



Tablet Button



Input & Output Ports



Hand Strap & Kick Stand

Product Specification

Model Name		MT-1200 (12.1" Tablet PC)
Motherboard	CPU	Intel Celeron M or Pentium M @ 800 MHz ~1.1GHz (BGA Type)
	Core Logic	Intel 852GM + ICH4
	Memory	SO-DIMM x 1, Up to 1GB
	Graphic	UMA Share Memory up to 64MB
LCD & Touch	LCD Size	12.1 inch (4:3 Standard ; 16:9 Optional)
	Brightness	Up to 190 cd/m ²
	Resolution	1024 x 768 (4:3 Standard) / 1280 x 800 (16:9 Optional)
	Touch Type	4-wire Resistive type
Storage & Expansion	HDD or Compact Flash	1.8" HDD Drive Bay or Type II C/F Card
	Memory Card Reader	SD Type Card Reader
	PCMCIA	PC CardBus Type II slot
Input/Output	USB	2 x USB(2.0)
	LAN	1 (10/100 Mbps)
	Headphone	1
	MIC	1 x (External Jack) & 1 x Built-in MIC
	Speakers	1.5 W x 2 (Built-in)
	2nd VGA Output	1
Button & Indicators	LED	3 (1 x Wireless, 1 x Battery, 1 x HDD)
	Tablet Buttons	3 (F1 Windows Task Manager, F2 & F3 defined by user)
Power & Battery	Power Adaptor	19V / 65W (100V ~ 240V)
	Battery	Rechargeable Li-ion (451P, 14.8V, 2400mAh) Normal run 2.5 hours
Environmental	EMC & Safety	CE/FCC Class B, cUL
	Operating Temperature	0°C ~ 35°C (32°F~95°F)
	Operating Humidity	20% ~ 80% (Non-Condensing)
	Thermal Management	Fanless, Passive Cooling
	IP Rating	IP53 (Front Bezel only)
	Drop Test	32 inch high free fall (For C/F card only)
Wireless		Wi-Fi 802.11 b/g
Dimension (W x H x D)		313 x 235 x 35.7 mm
Net Weight		1.7 kgs (With Battery)
Mounting Support		VESA Holes (75 x 75 mm)
Operating System		Windows XP-P, Windows XP-embedded
Options	Docking Station	3 x USB(2.0), 1 x LAN, 1 x DC-In
	Camera	CMOS 1.3 Mega Pixels (USB)
	FingerPrint	Chip Sensor Type, 500 pixels per inch (USB)

Ordering Information


●MT-12NF-CB-A

12.1" Tablet PC, Celeron M 1.0GB CPU, 2GB C/F Card, 512 MB Memory & Win XP-e

●MT-12NF-HB-B

12.1" Tablet PC, Celeron M 1.0GB CPU, 20GB HDD, 512 MB Memory & Win XP-P

MT-12NF-CB

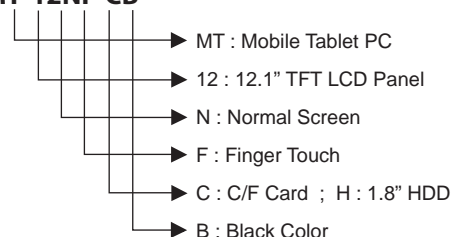

©2006 Flytech Technology Co., Ltd. Registered trademarks and trademarks are property of their respective owners. The specification is subject to change without prior notice. Flytech endeavors to ensure that the information in this document is correct and fairly stated but does not accept liability for any error or omissions. The development of Flytech products and services is continuous, and published information may not be up to date. It is important to check the current position with Flytech.

©2005-2006 FLYTECH Technology Co., Ltd. All right reserved. S - 1008 - 0611 - 1200A



FLYTECH Technology Co., Ltd.
 No.168, Sing-ai Rd.,
 Neihu District, Taipei City 114,
 TaiwanTel: 886-2-8791-4988
 Fax: 886-2-8791-4966
 E-mail: sales@flytech.com.tw
 www.flytech.com

USA
 1931 Hartog Drive, San Jose, CA 95131, U.S.A. Tel: 408-573-9113 Fax: 408-573-9509 E-mail: sales@flytech.com http://www.flytech.com
 Japan
 3-17-11-101 Inada, Nagano-Shi, Nagano-Ken, Japan Fax: 81-26-244-6197 E-mail: sales@flytech.co.jp
 Hong Kong
 Room 01, 6/F., Block A, Tonic Industrial Centre, 26 Kai Cheung Road, Kowloon Bay, Kowloon, Hong Kong, China
 Tel: 852-3525-5800 Fax: 852-2751-7447 E-mail: sales@flytech.com.hk http://www.flytech.com.hk
 China
 3F Building 39, No.333 Qin Jiang Rd., Shang-Hai 200233, China Tel: 86-21-5426-1555 Fax: 86-21-5426-1001 E-mail: sales@flytech.com.cn

Distribución: **ER-SOFT, S.A.** Email: er@er-soft.com, Tel: +34 916 408 408