

MPI-Accessory, SSW200



DIN rail adapter

For all SSW7- and NETLink PRO/USB adapter, we provide DIN rail adapters as an accessory.

The MPI adapters can be installed in a bigger distance with the MPI extension cable.

The cable also carries the power supply for the MPI adapter.


Ordering Data

	Order-No.
MPI-Accessory	
DIN rail adapter, short (for SSW7, SSW7-TS, SSW7-USB, NETLink PRO, NETLink USB)	700-751-HSH01
DIN rail adapter, long (only for SSW7-TS with Modem + ISDN + GSM)	700-751-HSH10
Extension cable	
Extension cable MPI bus, 5 m	700-751-6VK11
Extension cable MPI bus, 10 m	700-751-6VK21
Extension cable MPI bus, special lengths	700-751-6SO11



SSW200

With the SSW200 it is possible to connect a PC with suitable programming software to a S7-200¹⁾ via any standard COM port. You can set the transmission rate to match your PC with a selector switch.

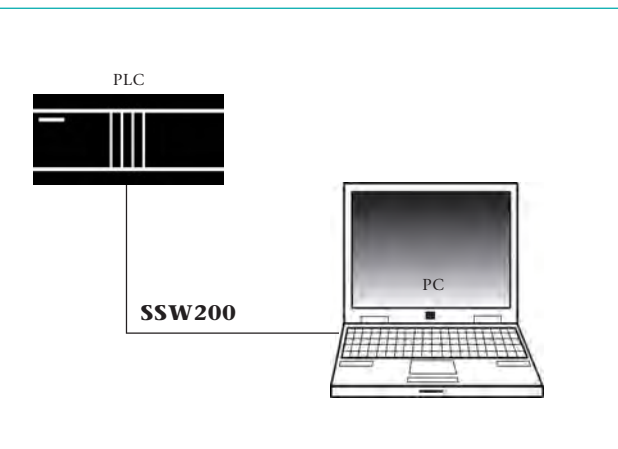

Ordering Data

	Order-No.
SSW200 for connecting PC to a CPU, 3 m	700-751-2VK11

1) S7-200® is a registered trademark of Siemens AG

Technical Data

PPI interface	
Type	RS485
Transmission rate (depending on switch position)	1200, 2400, 9600, 19200, 38400 Kbit/s
Connectors	SUB-D 9-way
Communication interface	
Type	RS232
Transmission mode	serial asynchron
Transmission rate (depending on switch position)	1200, 2400, 9600, 19200, 38400 Kbaud
Female connector	SUB-D, 9-way