



Tap Connector (Ref 13010)

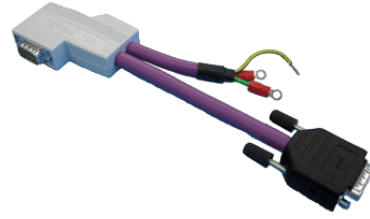

Introduction

The Tap Connector is a cable to connect **ProfiTrace** and/or an **Oscilloscope** to a DP network. It has all the necessary leads available and has been designed not to cause network disturbances due to stub lines. A perfect vertical position for ProfiTrace is obtained that does not overpressure the PG connector on the devices. The cable is of the flexible type so you can move it to all directions.

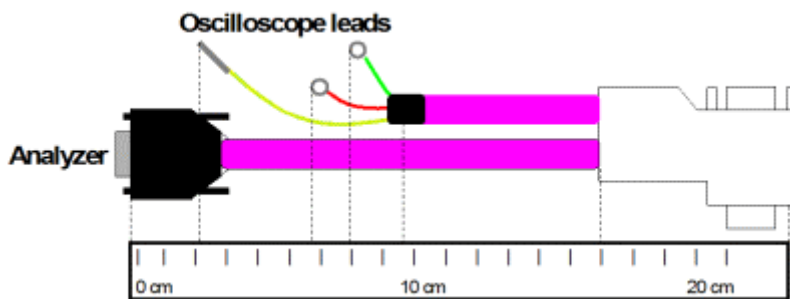

Product features

- ▶ PROFIBUS DP male/female connector
- ▶ DB 9 male connector
- ▶ Flexible cable
- ▶ Oscilloscope leads with grip rings: A, B and Shield
- ▶ Applications for every analyzer and oscilloscope
- ▶ Up to 12 Mbit