

Plant modernisation with ABC IT Systems Version 1

Current Condition

- Simatic S5 PLC-System 115U
 - Central rack
 - CPU 944B
 - WF 470 (visualisation)
 - IP 244 (temperature control)
 - Analogue input/output cards (8 channels each)
 - Expansion racks with digital input/output cards
 - STEP5 program

Central rack



Expansion racks with digital input/output cards





STEP5

VISU


2

Current Condition - Assessment

- S5 components to be discontinued
- Procurement of spare parts difficult and expensive
 - WF 470
 - IP 244
- CPU944B at performance limit
- VISU customisations (WF470) very complicated

Central rack









STEP5

VISU

3

Modernisation targets

- Replacement of CPU944B with X-CPU (STEP 5 and STEP 7 programmable).
- Conversion of STEP5 program into STEP7.
- Connection of the new VISU to WinCC flexible.
- Removal of WF 470 from central rack.
- Replacement of expansion racks with modern field-bus components (e.g. Profibus, Profinet, Ethercat).
 - Replacement of digital I/O cards with, for example, Siemens ET200S modules.
- Replacement of IP244 temperature-controller component group with field-bus components.
- Replacement of central rack with modern components.
- Creation of performance reserves.

Expansion racks with digital input/output cards









STEP5



VISU

4

Step and Simatic are registered trademarks of Siemens AG Profibus, Profinet, EtherCat are trademarks of the respective holde

ABC retrofit - concept

- ✓ The ABC retrofit concept constitutes the basis for the expansion and modernisation of Simatic S5 system controls.
- ✓ The costs for the individual modernisation and conversion phases may be precisely specified (cost control).
- ✓ Systems will be modernised according to the state-of-the- art over a planned period of time (planning reliability).
- ✓ No additional system downtimes during the individual phases of modernisation.

1.1. Replacement of CPU944B with X-CPU

- Free review of the S5 software.
- Software customisations for mixed operations with S5 and S7 (optional).
- Program pulled from existing CPU944B.
- The power to the existing control will be switched off, the CPU944B will be replaced with ABC X-CPU.
- Ethernet connection to ABC X-CPU.
- Loading of the S5 program with STEP5.


VISU

- Test run / production with ABC X-CPU.
- Phasing out easily possible.



1.2. S5 conversion into S7 program


- S5 program will be converted into an S7 program.
- Software customisations for special component groups in STEP7.
- System will be stopped.
- The S7 program will be loaded into ABC X-CPU with STEP7.
- Test run / production with STEP7 program.
- Phasing out easily possible.

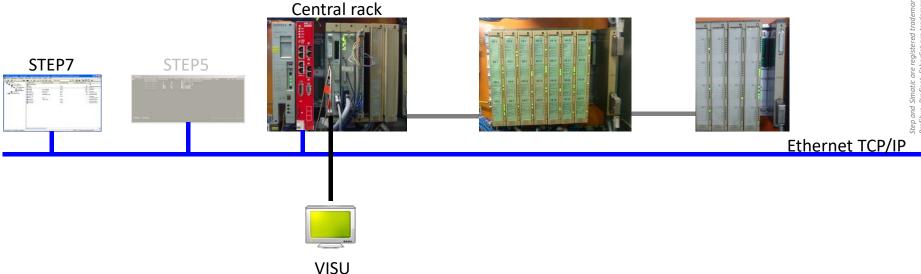

2. Connection of the new VISU

- WinCC flexible (e.g. OP277) will be set up in parallel to the existing VISU (from WF 470).
- WinCC flexible is able to access ABC X-CPU directly via Ethernet.
- No production downtimes, implementation may be realised while operations are on-going.
- The old VISU may be deactivated when all functions have been integrated into the new VISU.
- New VISU may be customised by the person responsible for maintenance.
- Implementation may be realised by the customer.

WinCC flexible

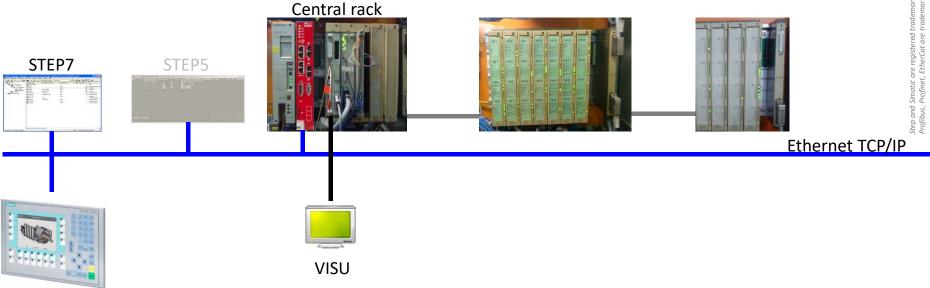


2.1. Creation of a new VISU

- Integration of data points into the new WinCC flexible VISU.
- Creation of masks.
- Integration of malfunction alert function into WinCC flexible.
- Function tests.

WinCC flexible


New VISU may be tested in parallel to the old VISU.

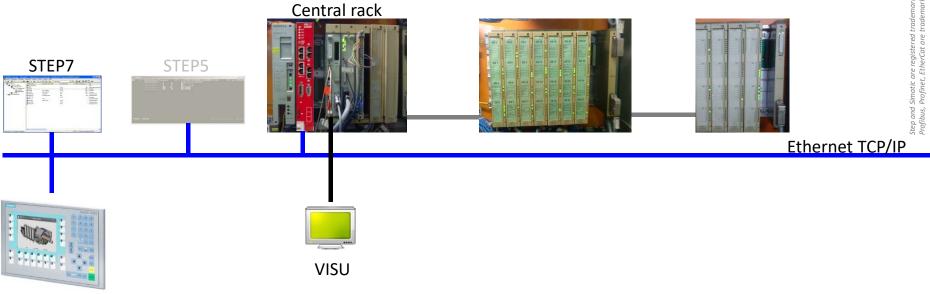

2.2. Removal of the old VISU


- The old VISU (WF 470) may be removed from the PLC program once all the new functions have been integrated into the new VISU.
- Removal of the WF 470 hardware.

WinCC flexible

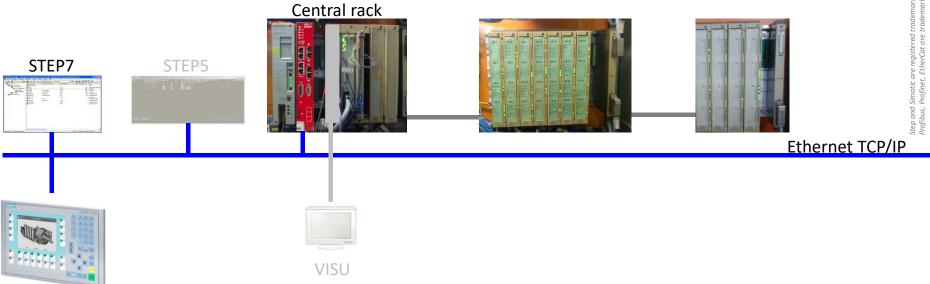


3.1. Replacement of expansion racks, digital and analogue component groups with Profibus/Profinet/Ethercat components

- Plugging of the ABC Profinet extension board on to ABC X-CPU.
- Replacement of expansion racks with Profinet components, e.g. ET200S.
 - Digital I/Os
- Replacement of analogue component groups with Profinet components.
- Configuration of the Profinet controller.
- No customisation of STEP7 programming necessary.

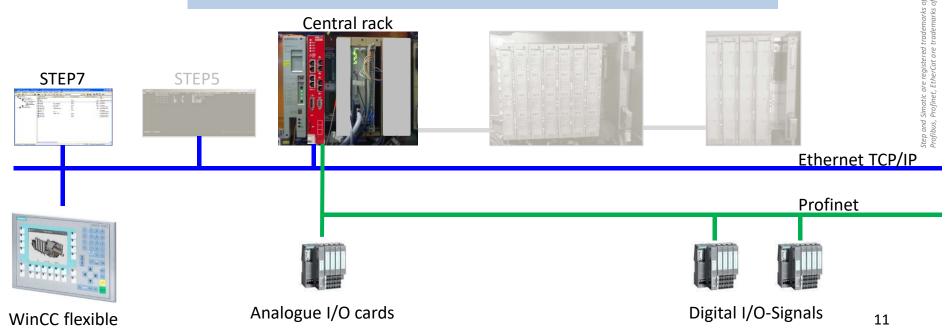


3.2. Replacement of the IP244 temperature-control component group with Profinet components

- Installation of the ET200S module with "2AI TC ST" temperature-measuring modules.
- Connection of the existing NiCr-Ni (K) temperature sensors to the temperature-measuring module.
- Parameterisation of the Profinet and temperature-measuring modules.
- Software customisation in the PLC program (Integration of the standard temperature-control components).
- Removal of the IP244 component group.
- Only the S5-IP244 component group needs to be refitted if taking into operation is interrrupted; the system will then be ready for production.

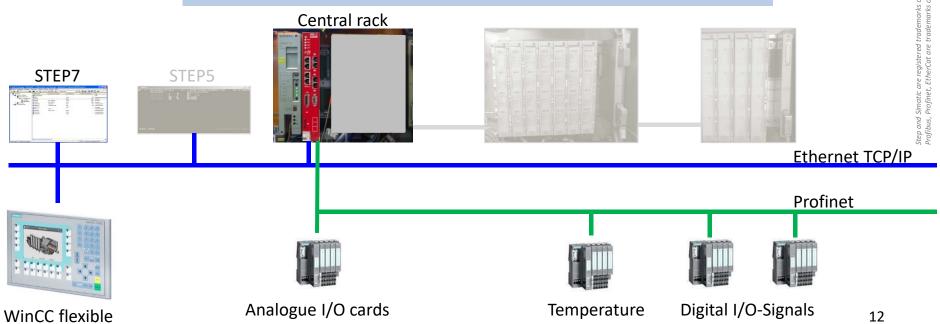


4. Removal of the central rack

- All Simatic S5 rack components are realised decentrally via Profinet.
- Only ABC-X-CPU still remains in the Simatic S5 rack (prerequisite for substitution).
- The ABC-X-CPU with Profinet extension is integrated into a compact housing.

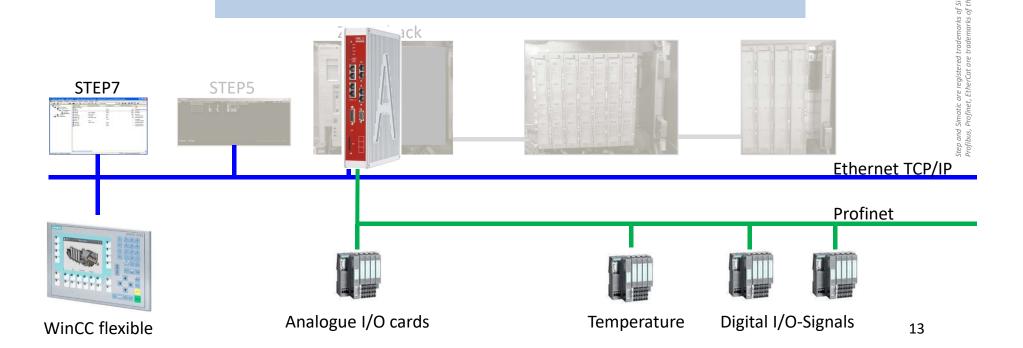

5. System future-proof

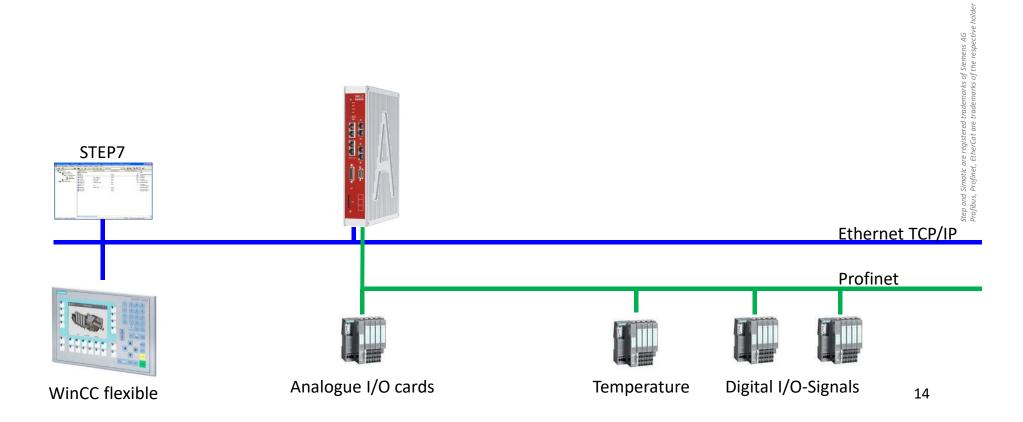



Retrofit with ABC X-CPU


Benefits:

- Short changeover times.
- Existing and production-reliable S5 program may be kept and even extended.
- Shorter cycle times.
- 4x Ethernet CPs on board.
- Replacements and customisations may be implemented in STEP7.
- New visualisation system, e.g. WinCC flexible, may be connected in parallel to the existing VISU.


Services

- Creation of modernisation concepts for old system controls.
- Support with the implementation of retrofits.
- Consulting and implementation in the fields of software development, network engineering and databases.
- We are able to offer industrial seminars, e.g. component group training for X-CPU.

Cost example

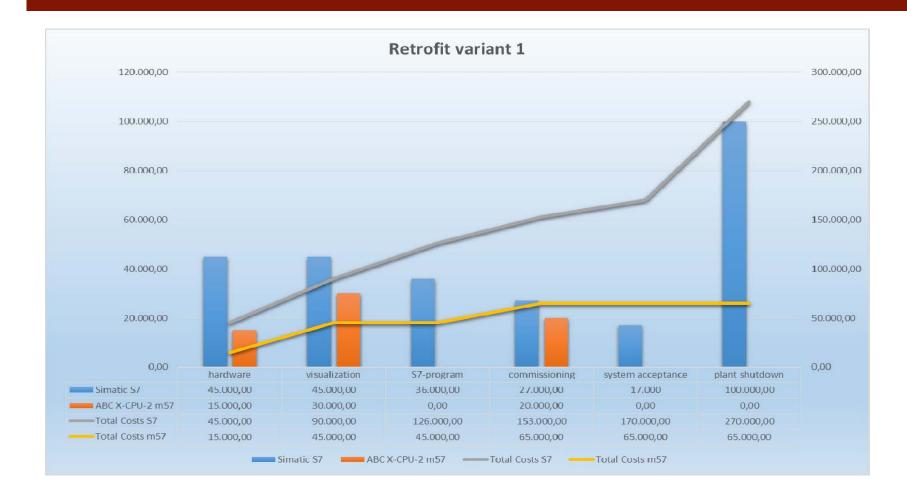


ABC components

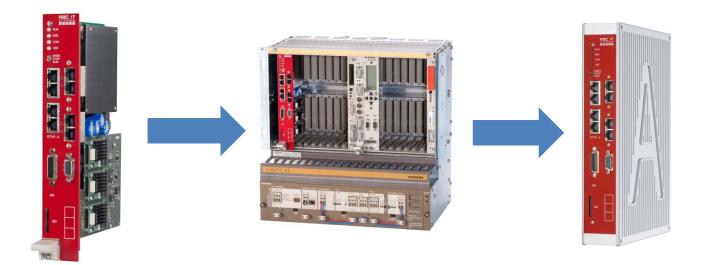

www.abcit.eu

Step and Simatic are registered trademarks of Siemens AG Profibus, Profinet, EtherCat are trademarks of the respective holder

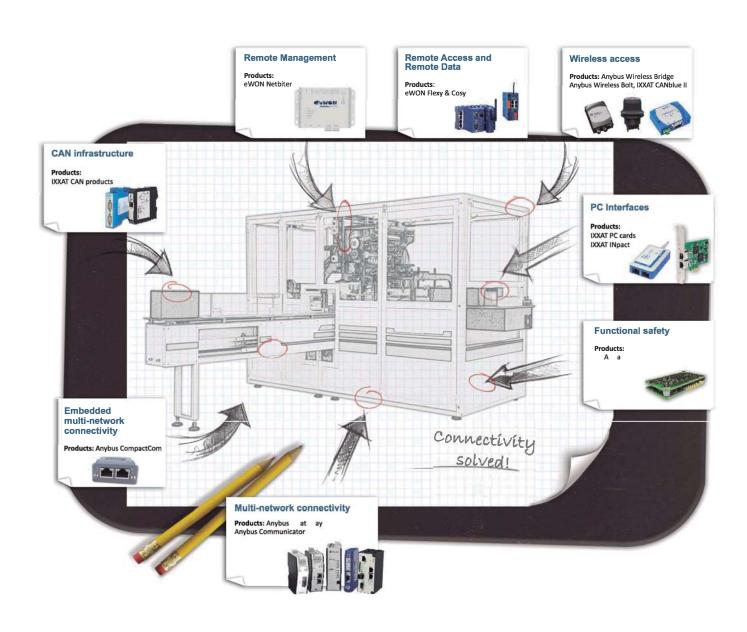



Todo en Redes Industriales, Buses de Campo, Comtrol de Proceso.

ER-Soft, S.A., C/ Comunidad de la Rioja, 3 28231 Las Rozas (Madrid) www.er-soft.com, info@er-soft.com, Tel: 916 408 408